

ADDISON BH

THE ECONOMICAL UNITARY INFRARED HEATER

CUT ENERGY
BILLS BY UP TO
50%
WITH ADDISON™
www.addison-hvac.com




BH-SERIES

- Longer life provided by durable components
- Clean, quiet draft-free comfort
- Easy serviceability provided through hinged door design
- Design flexibility achieved with multiple configurations including both L- and U-tube options and a broad range of burner sizes and tube lengths

www.addison-hvac.com
Telephone: +1.407.292.4400



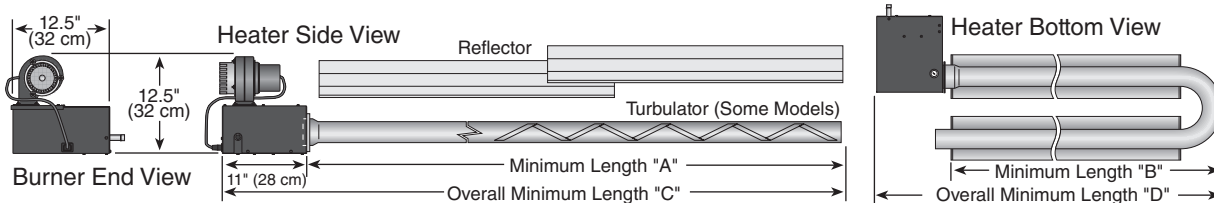

ADDISON® BH

Model	BH-40	BH-60/80	BH-100/115	BH-125/140	BH-150/175	BH-200
Minimum Length of Straight Tube* [ft, in] A	10	20	30	40	50	60
Minimum Length of U-Tube* [ft, in] B	N/A	11, 7	16, 7	21, 7	26, 7	31, 7
Overall Minimum Length of Straight Tube* [ft, in] C	10, 11	20, 11	30, 11	40, 11	50, 11	60, 11
Overall Minimum Length of U-Tube* [ft, in] D	N/A	12, 6	17, 6	22, 6	27, 6	32, 6

* For additional lengths, please see the current Installation, Operation and Service Manual.

Input [Btu/h] x (1000)	40	60	80	100	115	125	140	150	175	200
Inlet Pressure [in wc] NG min.	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	5	5
LPG Propane min.	11	11	11	11	11	11	11	11	11	N/A
NG & LPG Propane max.	14	14	14	14	14	14	14	14	14	14
Gas Connection NPT	½"	½"	½"	½"	½"	½"	¾"	¾"	¾"	¾"

Overall Length of Tube and Accessory Packages [ft]	WEIGHTS								
	10	20	30	40	50	60	70	80	
Hot Rolled or Aluminized Tube with Aluminum Reflector [lb]	52	86	120	161	206	240	281	322	
Aluminized Tube with Stainless Steel Reflector [lb]	66	113	152	208	265	304	360	416	
Burner [lb]	29								
Aluminized U-Tube with Aluminum End Caps [lb]	19								
Aluminized U-Tube with Stainless Steel End Caps [lb]	20								
Fuel	NG or LPG Propane								
Electrical Supply	120 V, 60 Hz, 1 A								
Heat Exchanger Tubing	10 ft Sections, 4" dia, 16 Gauge, First 10 ft ALUMI-THERM® Steel Tubing [Remaining Hot Rolled or Heat Treated Aluminized Steel Tubing]								
Exhaust Flue dia	4"								
Reflector and End Caps	.024 Aluminum [Optional - .024 Stainless Steel Type 304]								
Control System	Fully Automatic, Three-Try, 100% Shut-Off, Direct Spark Electronic Ignition Control								
Approved As	Indoor (Vented or Unvented)								
Certification	ANSI Z83.20/CSA 2.34, 2.17, 2.20								
Warranty	Three-Year Limited (Refer to Installation, Operation and Service Manual for Details)								

Clearances to Combustibles **[in]		BH-40		BH-60		BH-80		BH-100		BH-115/125		BH-140/150		BH-175/200	
Horizontal	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°
		6	8	6	8	6	8	6	10	6	10	6	12	8	12
		27	8	35	8	38	8	40	8	46	8	50	8	52	8
		52	50	62	59	65	65	70	73	76	77	79	83	82	85
		27	46	35	54	38	60	40	64	46	69	50	74	52	79

**Clearances B, C and D can be reduced by 50% for locations 25 ft (7 m) or more downstream of the burner. For other mounting options and associated clearances, complete installation, operation and service criteria, please see the current issue of the Installation, Operation and Service Manual.

ADDISON
7050 Overland Road
Orlando, FL 32810 U.S.A.
Telephone: +1.407.292.4400
Fax: +1.407.290.1329
www.addison-hvac.com

Installation Code and Annual Inspections: All installation and service of ADDISON® equipment must be performed by a contractor qualified in the installation and service of equipment sold and supplied by Addison and conform to all requirements set forth in the ADDISON® manuals and all applicable governmental authorities pertaining to the installation, service, operation and labeling of the equipment. To help facilitate optimum performance and safety, Addison recommends that a qualified contractor conduct, at a minimum, annual inspections of your ADDISON® equipment and perform service where necessary, using only replacement parts sold and supplied by Addison.

Further Information: Applications, engineering and detailed guidance on systems design, installation and equipment performance is available through ADDISON® representatives. Please contact us for any further information you may require, including the Installation, Operation and Service Manual.

These products are not for residential use.

This document is intended to assist licensed professionals in the exercise of their professional judgment.