





**Phoenix**  
AIR SYSTEMS

## PA CONDENSATE CONTROL DIFFUSERS

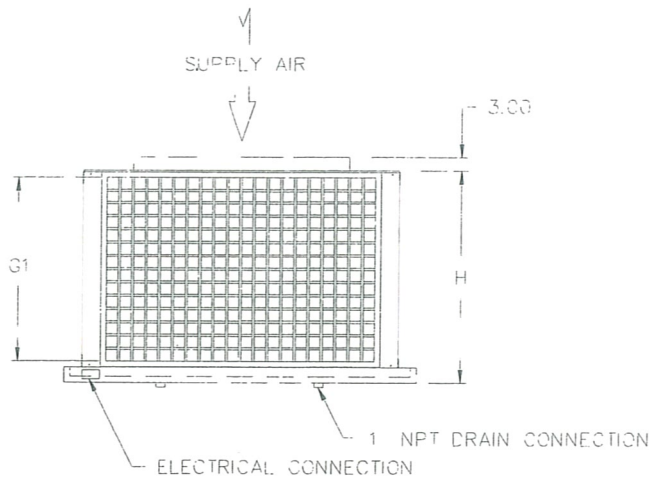

**ELEVATION VIEW**

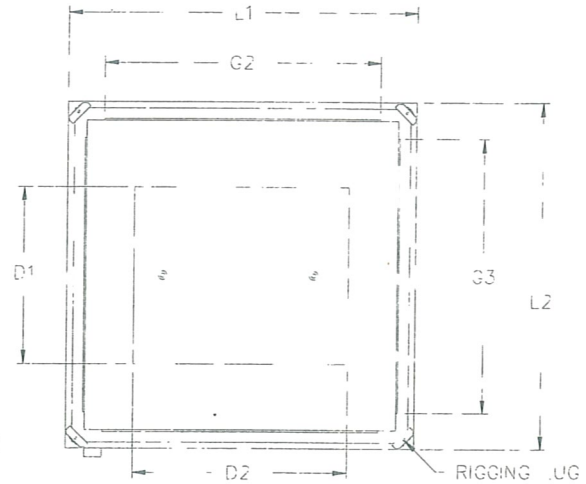

**PLAN VIEW**

**Specifications:**

The diffusers are constructed from 304 stainless steel and are complete with a double wall, heated drain pan. The diffusers are insulated with a minimum of 1" of polystyrene insulation. The diffuser is sealed water tight for complete cleaning. The diffuser is complete with four, 4-way adjustable anodized aluminum registers. Stainless steel registers, volume dampers and sterilizing ultra-violet lights are available.

Condensate Control Diffusers										
Model	CFM	Dimensions (in)								Weight
		H	L1	L2	D1	D2	G1	G2	G3	
CC-02	2,000	16	32	32	12	12	10	14	14	125 #
CC-03	3,000	22	32	32	14	14	16	14	14	130 #
CC-04	4,000	22	38	38	20	20	16	20	20	150 #
CC-06	6,000	30	38	38	20	20	24	20	20	180 #
CC-08	8,000	30	48	48	26	26	24	30	30	205 #
CC-10	10,000	30	48	48	26	26	24	30	30	300 #
CC-12	12,000	36	48	48	30	30	30	30	30	360 #
CC-15	15,000	40	48	48	32	32	34	30	30	390 #
CC-20	20,000	40	60	60	42	42	34	42	42	490 #
CC-25	25,000	48	60	60	42	42	42	42	42	590 #
CC-28	27,500	36	60	120	56	40	30	42	98	650 #
CC-35	35,000	40	60	120	72	40	34	42	98	800 #
CC-42	42,000	54	60	120	84	40	48	42	98	905 #
CC-50	50,000	54	60	120	96	40	48	42	98	1000 #
CC-60	60,000	68	60	134	116	40	62	42	112	1140 #
CC-70	70,000	68	60	134	116	46	62	42	112	1380 #

