


THERM-O-THRIFT

118
VT & VTL

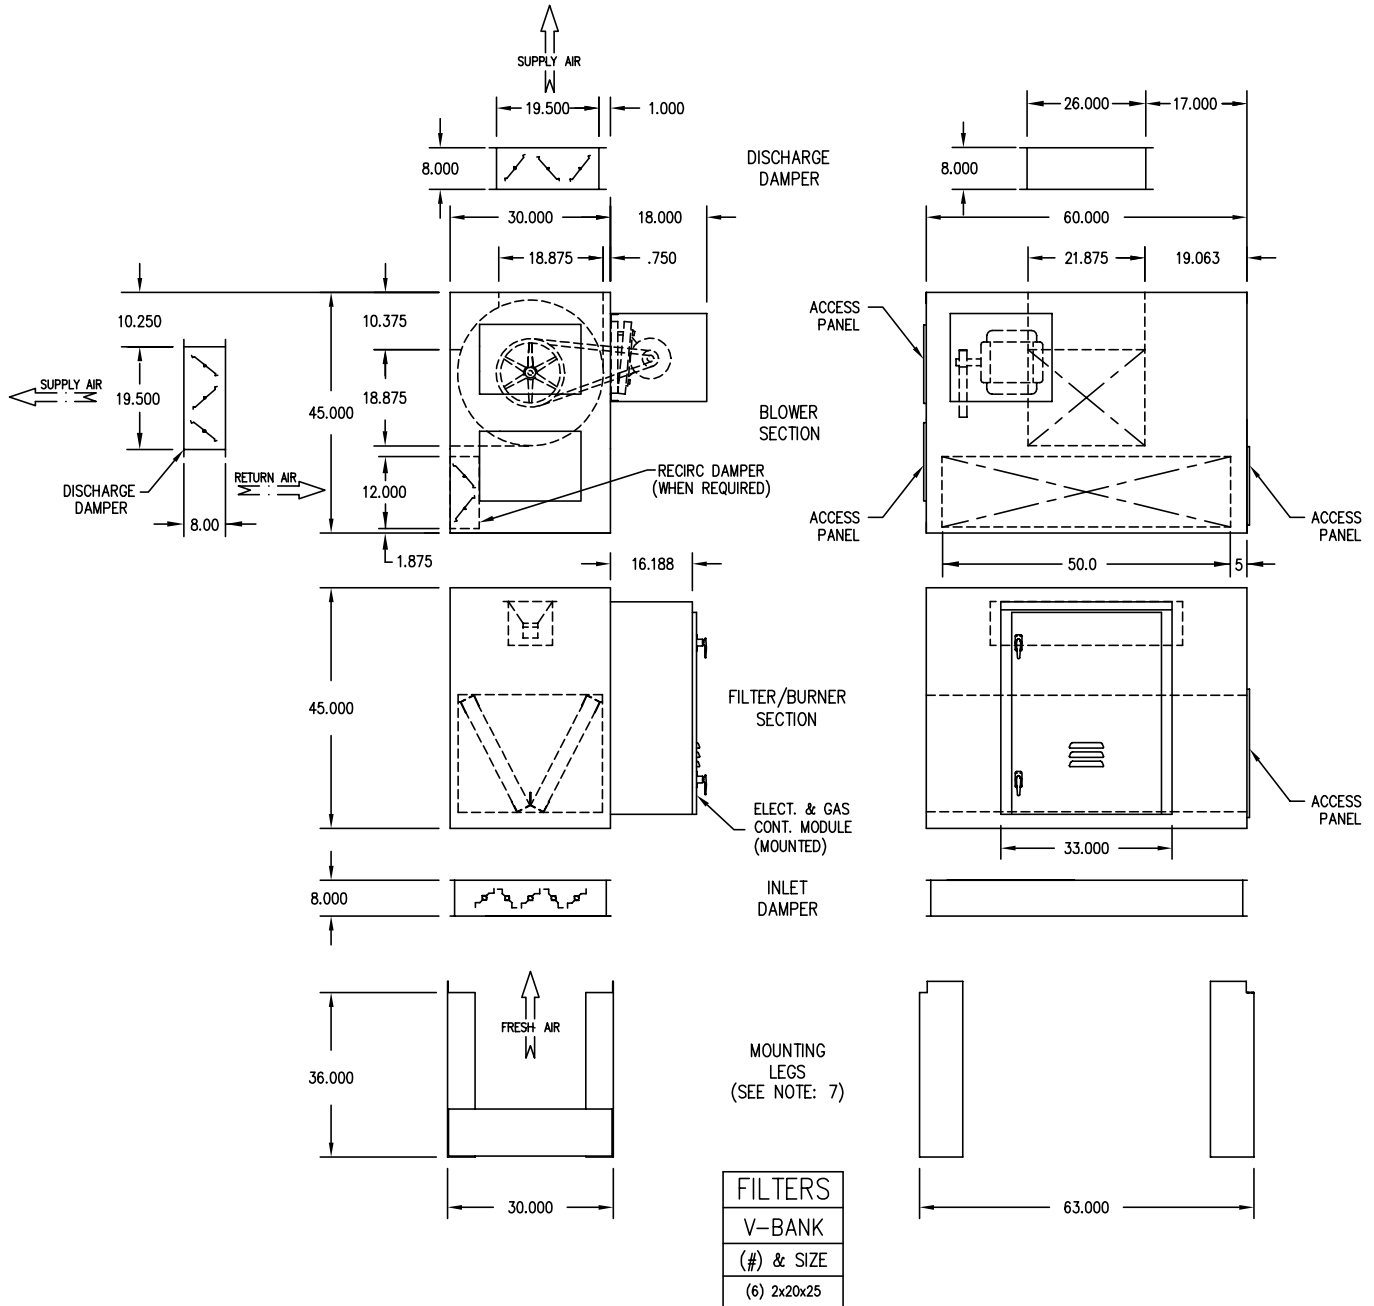

NOTES:

- 1.) DRAWING IS NOT TO SCALE. DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION.
- 2.) UNITS ONLY SUPPLIED IN LEFT HAND ARRANGEMENT AS SHOWN.
- 3.) STANDARD ADJUSTABLE DRIVE THROUGH 10 HP.
- 4.) OUTDOOR UNITS ARE PROVIDED WITH WEATHERPROOF HOUSINGS OVER FAN MOTOR, DRIVES AND DAMPER OPERATOR.
- 5.) UNIT SHOULD BE INSTALLED A MINIMUM OF 24 INCHES FROM ROOF.
- 6.) ALL UNITS ARE PRE-PIPED, PRE-WIRED, AND FIRE-TESTED PRIOR TO SHIPMENT.
- 7.) MOUNTING LEGS CAN NOT BE USED WITH INLET DAMPER, MUST USE VERTICAL STAND.